





CARPET TILES **PHOENIX**

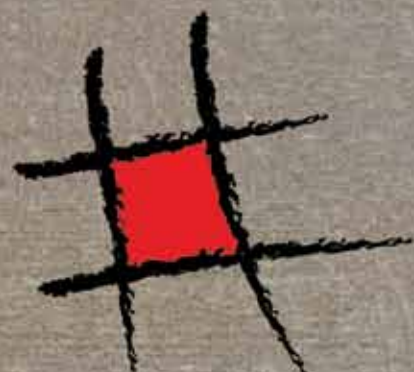



PH 104



PH 204




PH 304 (591)



PH 305



PH 205



PH 107



PH 207



PH 105



PH 106



PH 102




PH 202 (721)

PHOENIX

Style	Phoenix
Construction	Level loop
Yarn	100% Olefin Polypropylene
Gauge	1/10 inch
Pile Height	3mm
Pile Weight	550gr/m ²
Total Weight	4500gr/m ²
Primary Backing	Non Woven
Secondary Backing	PVC+Fiber Glass +PVC
Dimensions	50cm x 50cm
Colour System	100% Solution Dyed
Area of Use	Commercial
Static Control	Life of the Carpet
Packing	20pc's/carton (5m ²)

Approved installation method

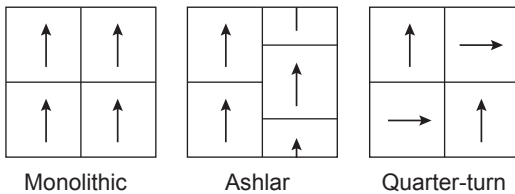

General Contract.
ASTM D-5252 (+75% pile retention after 4000 cycles)



Stanlon
Extra Durable Polypropylene



Flame Resistance.
Passes the British Hot Metal tests ASTM D -2859//
FFI-70//16 CFR 1630 Pass 8/8



Synthetic fiber and backing gives
Inherent resistance to Micro
organism and insect attack.



Colourfastness 5/5 on gray scale



A Lifetime Anti-Static Guarantee



- Specifications are subject to normal manufacturing tolerances.
- As in all quality carpets, colors are subject to dye lot variation
- Replaceable walk off mats are recommended at entrances to minimise soiling.

