



# FLOORFIT



**Indoor Interlocking  
Rubber Tiles  
50 x 50 cm**






Weight area




51 x 51 cm

Thickness 12 mm

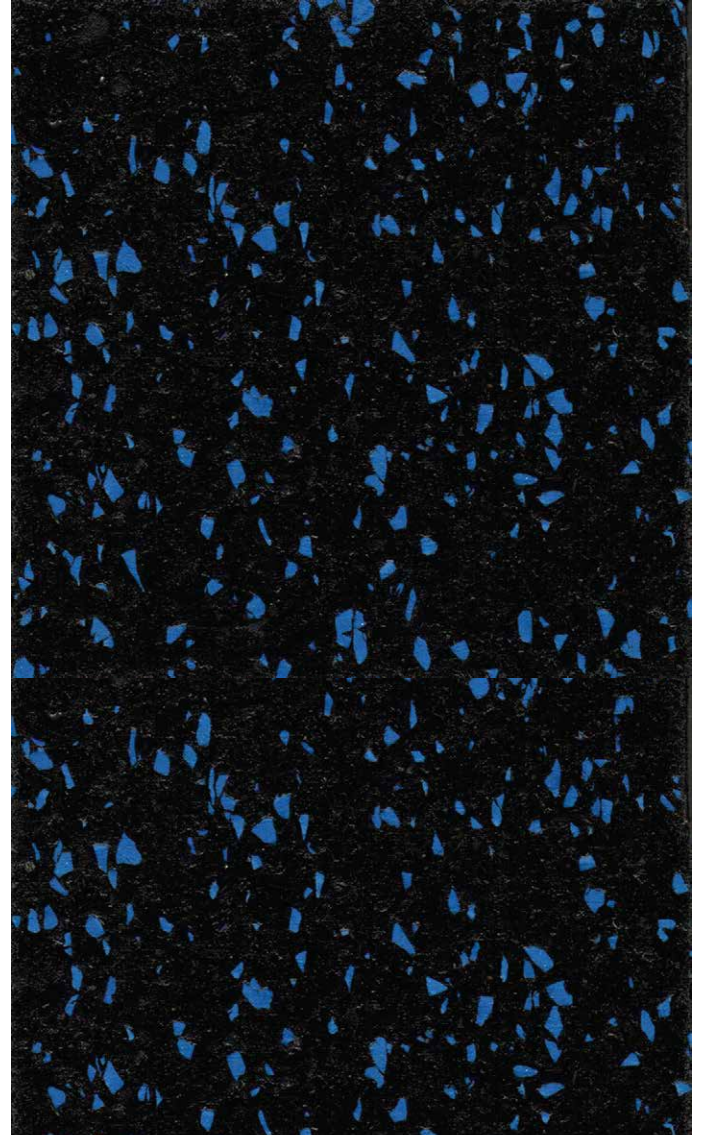


**White 1201**

**Blue 1202**

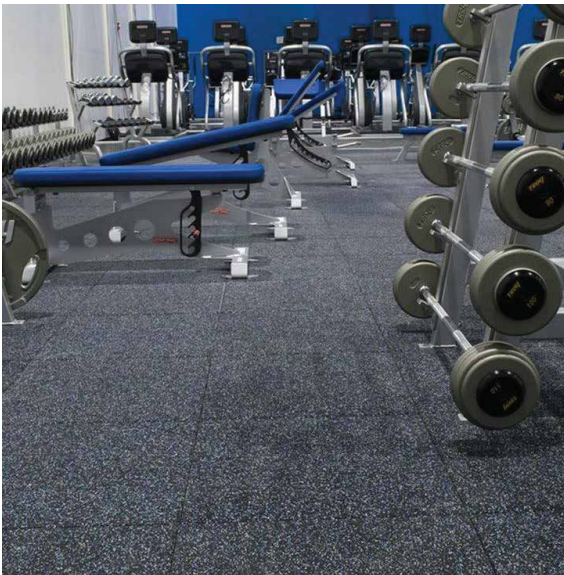




50 x 50 cm  
Thickness 10 mm

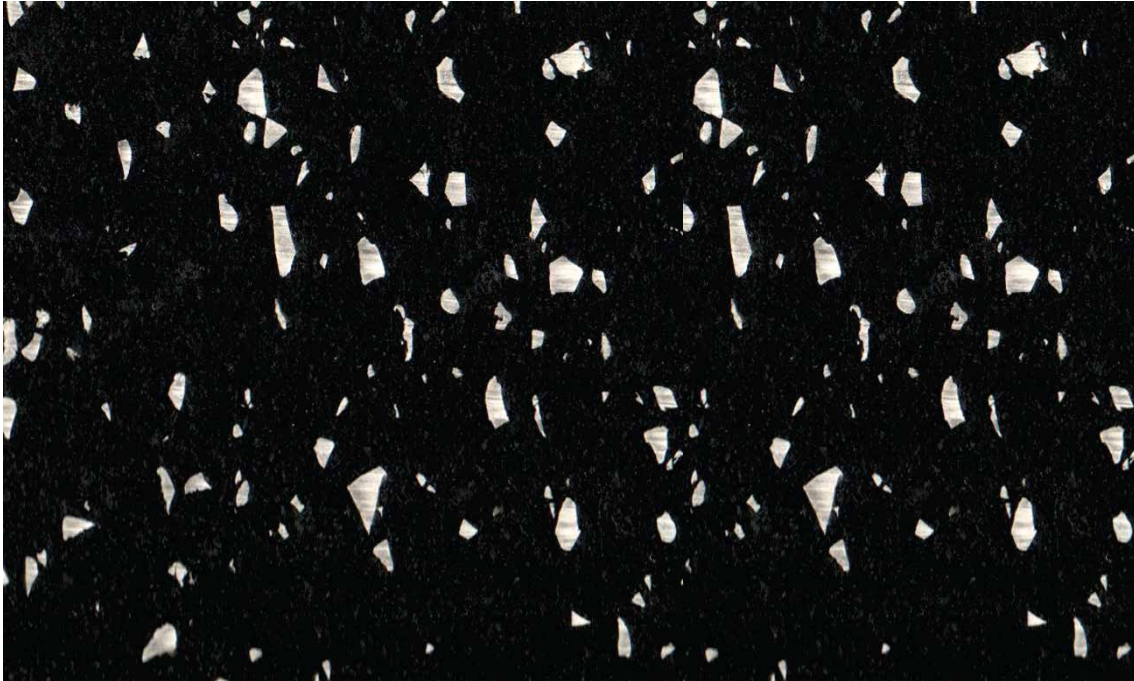


**White 1001**

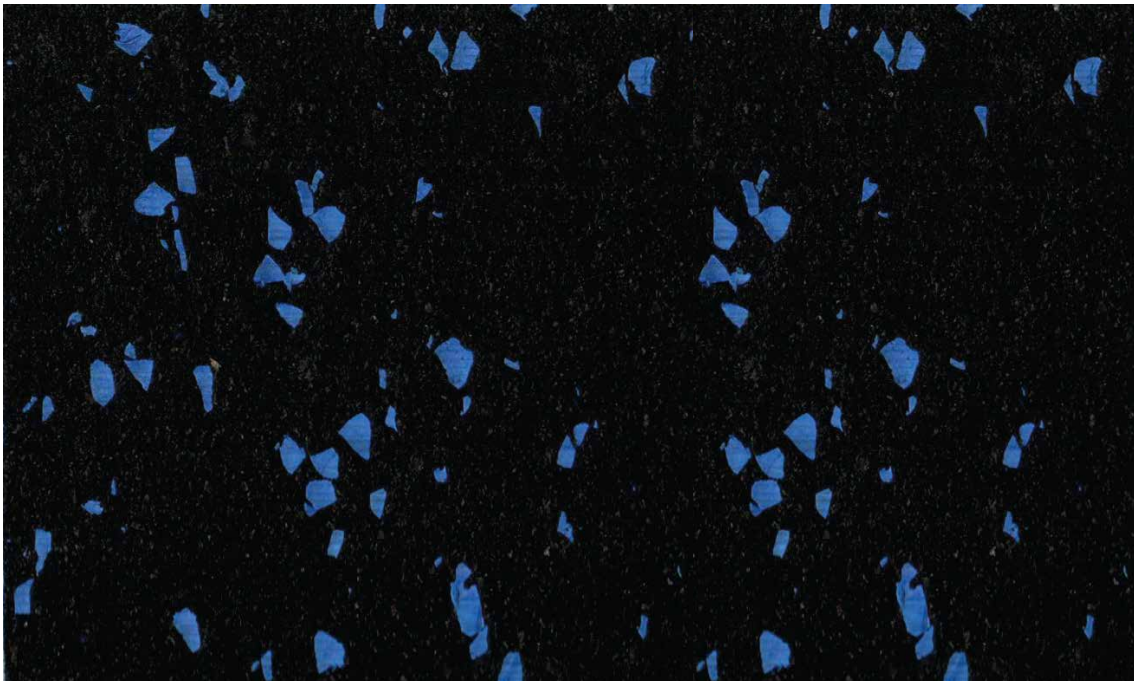

**Blue 1002**



50 x 50 cm  
Thickness 6 mm

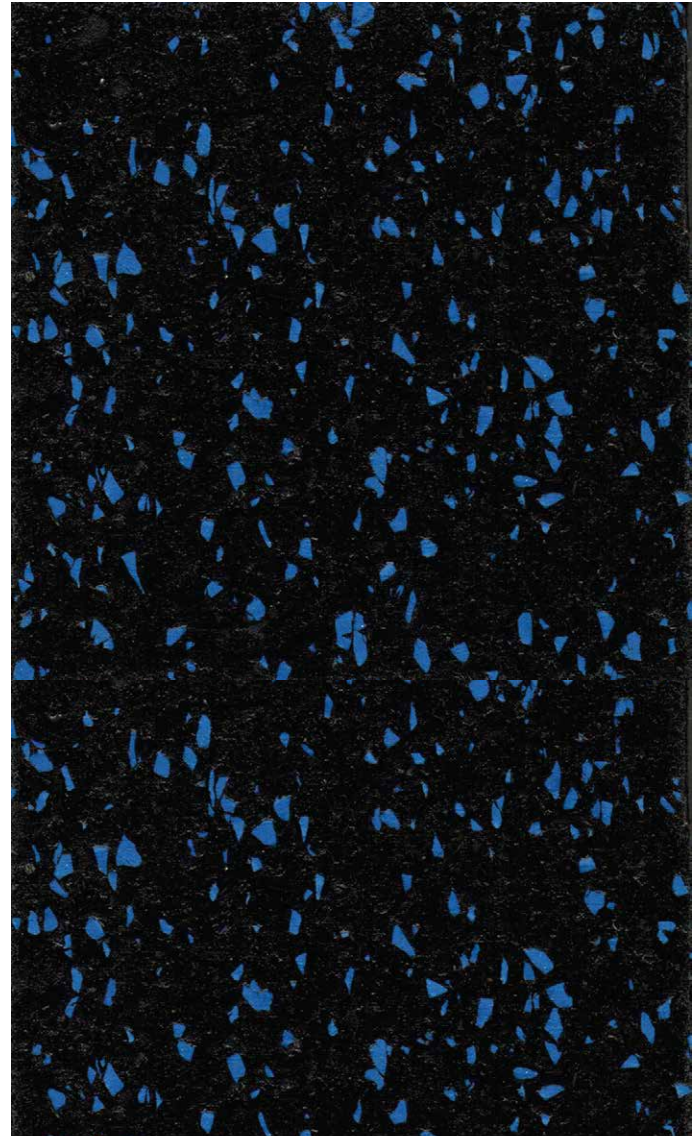


**White 601**

**Blue 602**

- \* Slip-Resistant
- \* Easily-Cleaned & Maintained
- \* Sound Absorbent
- \* Withstands Heavy Traffic and Use



**CARDIO** **SPINNING ROOMS** **ENTRYWAYS** **LOCKER ROOMS** **ICE ARENAS** **STADIUMS** **SKI RESORTS** **GOLF FACILITIES**

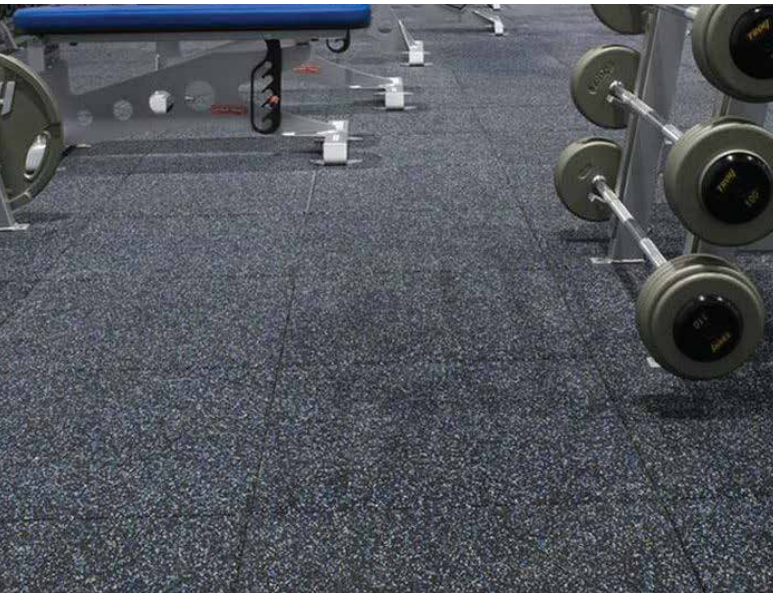

- \* UV Stabilized
- \* Chemical Resistant
- \* Water Resistant
- \* Non Slip

- \* Quiet to Walk-on
- \* Strong, Tough & Resilient
- \* Easy Maintenance
- \* 100% Recyclable



Technical Data			
	6 mm	10 mm	12 mm
<b>Thickness</b>	6 mm	10 mm	12 mm
<b>Material</b>	Recycled SBR rubber and EPDM	Recycled SBR rubber and EPDM	Recycled SBR rubber and EPDM
<b>Size</b>	50 cm x 50 cm	50 cm x 50 cm	51 cm x 51 cm
<b>Top Layer Thickness</b>	N/A	N/A	2 mm
<b>Weight per m<sup>2</sup></b>	7 kg	11.3 kg	12.5kg
<b>Tensile Strength</b>	1.18 N/mm ASTM D412-06a	1.13 N/mm ASTM D412-06a	Appr. x 1.4 MPa (Q/WMR01-2009)
<b>Elongation at Break</b>	47% ASTM D5617	48% ASTM D5617	Appr. x 90% (Q/WMR01-2009)
<b>Friction</b>	0.84 ASTM D2047	0.84 ASTM D2047	0.84 ASTM D2047
<b>Ball Rebound</b>	99% ASTM D2772	99% ASTM D2772	99% ASTM D2772
<b>Flammability</b>	Class 1 ASTM D648	Class 1 ASTM D648	Class 1 ASTM D648
<b>Standard Deformation +40C</b>	0.32mm ASTM D2199	0.48mm ASTM D2199	0.36mm ASTM D2199
<b>Force Reduction +40</b>	15% ASTM D1514	17% ASTM D1514	16% ASTM D1514
<b>Shore A Hardness</b>	65 shore	60 shore	Appr. 56HA (Q/WMR01-2009)
<b>Temperature Resistance</b>	-30°C -120°C	-30°C - 120°C	Appr. -40°C to + 100°C
<b>Building Class</b>	B2	B2	B2

