

Tred-MOR® 1562



SPECIFICATION DATA

Product Code:	BV0171
Product Name:	Tred-MOR® 1562
Traffic Classification:	Extra-Heavy
Material Weight:	2100 g/m ² (62 oz./sq. yd.)
Density:	528 kg/m ³ (33 lbs./cu. ft.)
Thickness:	3.96 mm (0.156")
Product Dimensions:	1.37m x 18.29m - 25 m ² (54" x 60' - 30 sy.)
Mfg. Tolerances:	Width: +/-1% Thickness: +0.030/-0.015
Approx. Shipping Wt.:	56.25 kgs/roll (124 lbs. per roll)
Color:	Black
Material Content:	Made with Synthetic Rubber
Design Configuration:	Flat/Flat
Backing Top:	Spunbonded
Backing Bottom:	Poly-Tek
Antimicrobial:	Guardian™
Moisture Resistant:	98%
StainSTOPTM:	Yes
Indoor Air Quality:	CRI Green Label Plus-certified

COMFORT AND DURABILITY

CLD PSI @ 25% Deflec. Min.:	7 (Method 601/12151)
CLD PSI @ 65% Deflec. Min.:	45 (Method 601/12151)
Breaking Strength PSI Length:	45 (Min. ASTM-D2646)
Breaking Strength PSI Width:	41 (Min. ASTM-D2646)
Compression Set:	15%

FLAME CERTIFICATION

Pill Test:	Pass (DOC-FF 1-70)
Smoke chamber:	Pass
Flooring Radiant Panel:	*

*Not applicable to separate carpet cushion. Carpet must be tested in composition with cushion.

ACOUSTICAL PERFORMANCE

Impact Insulation Class (IIC):	71 (ASTM-492)
Sound Absorption (NRC):	0.30 (ASTM C423-81)

THERMAL INSULATION

R-Value:	0.270
K-Value:	0.577

OTHER

Meets Federal Spec.:	Class I (ZZ-00811B, Type I)
Electrostatic:	3.4 (AATCC-134)
Toxicity:	No more toxic than wood - an accepted industry standard

PRODUCT FEATURES

Tred-MOR is the nation's premium commercial carpet cushion. It is synonymous with Dubl-Stik®, and is the benchmark by which all others are measured. Tred-MOR can also be used in conventional stretch-in installation, and is available with QuikLIFT® backing.



Tred-MOR® 2580



SPECIFICATION DATA

Product Code:	BV0180
Product Name:	Tred-MOR® 2580
Traffic Classification:	Extra-Heavy
Material Weight:	2712 g/m ² (80 oz./sq. yd.)
Density:	416 Kg/m ³ (26 lbs./cu. ft.)
Thickness:	6.35 mm (0.250")
Product Dimensions:	1.37 m x 18.29 m - 25 m ² (54" x 60' - 30 sy.)
Mfg. Tolerances:	Width: +/-1% Thickness: +0.030/-0.030
Approx. Shipping Wt.:	70 kgs/roll (155 lbs. per roll)
Color:	Black
Material Content:	Made with Synthetic Rubber
Design Configuration:	Flat/Flat
Backing Top:	Spunbonded
Backing Bottom:	Poly-Tek
Antimicrobial:	Guardian™
Moisture Resistant:	98%
StainSTOP™:	Yes
Indoor Air Quality:	CRI Green Label Plus-certified

COMFORT AND DURABILITY

CLD PSI @ 25% Deflec. Min.:	5 (Method 601/12151)
CLD PSI @ 65% Deflec. Min.:	25 (Method 601/12151)
Breaking Strength PSI Length:	45 (Min. ASTM-D2646)
Breaking Strength PSI Width:	41 (Min. ASTM-D2646)
Compression Set:	15%

FLAME CERTIFICATION

Pill Test:	Pass (DOC-FF 1-70)
Smoke chamber:	Pass
Flooring Radiant Panel:	*

*Not applicable to separate carpet cushion. Carpet must be tested in composition with cushion.

ACOUSTICAL PERFORMANCE

Impact Insulation Class (IIC):	74 (ASTM-492)
Sound Absorption (NRC):	0.35 (ASTM C423-81)

THERMAL INSULATION

R-Value:	0.480
K-Value:	0.549

OTHER

Meets Federal Spec.:	Class I (ZZ-00811B, Type I)
Toxicity:	No more toxic than wood - an accepted industry standard

PRODUCT FEATURES

Tred-MOR is the nation's premium commercial carpet cushion. It is synonymous with Dubl-Stik®, and is the benchmark by which all others are measured. Tred-MOR can also be used in conventional stretch-in installation, and is available with QuikLIFT® backing.



Tred-MOR® 2500



SPECIFICATION DATA

Product Code:	BV0167
Product Name:	Tred-MOR® 2500
Traffic Classification:	Extra-Heavy
Material Weight:	3390 g/m ² (100 oz./sq. yd.)
Density:	528 Kg/m ³ (33 lbs./cu. ft.)
Thickness:	6.35 mm (0.250")
Product Dimensions:	1.37 m x 9.14 m - 12.5 m ² (54" x 30' - 15 sy.)
Mfg. Tolerances:	Width: +/-1% Thickness: +0.030/-0.015
Approx. Shipping Wt.:	43 kgs/roll (95 lbs. per roll)
Color:	Black
Material Content:	Made with Synthetic Rubber
Design Configuration:	Flat/Flat
Backing Top:	Spunbonded
Backing Bottom:	Poly-Tek
Antimicrobial:	Guardian™
Moisture Resistant:	98%
StainSTOP™:	Yes
Indoor Air Quality:	CRI Green Label Plus-certified

COMFORT AND DURABILITY

CLD PSI @ 25% Deflec. Min.:	7 (Method 601/12151)
CLD PSI @ 65% Deflec. Min.:	45 (Method 601/12151)
Breaking Strength PSI Length:	30 (Min. ASTM-D2646)
Breaking Strength PSI Width:	25 (Min. ASTM-D2646)
Compression Set:	15%

FLAME CERTIFICATION

Pill Test:	Pass (DOC-FF 1-70)
Smoke chamber:	Pass
Flooring Radiant Panel:	*

*Not applicable to separate carpet cushion. Carpet must be tested in composition with cushion.

ACOUSTICAL PERFORMANCE

Impact Insulation Class (IIC):	63 (ASTM-492)
Sound Absorption (NRC):	0.35 (ASTM C423-81)

THERMAL INSULATION

R-Value:	0.340
K-Value:	0.730

OTHER

Meets Federal Spec.:	Class I (ZZ-00811B, Type I)
Toxicity:	No more toxic than wood - an accepted industry standard

PRODUCT FEATURES

Tred-MOR is the nation's premium commercial carpet cushion. It is synonymous with Dubl-Stik®, and is the benchmark by which all others are measured. Tred-MOR can also be used in conventional stretch-in installation, and is available with QuikLIFT® backing.



FULL HOUSE™



SPECIFICATION DATA

Product Code	: BV0145
Product Name	: Full House™
Material Weight	: 110 oz./sq.yd.
Density	: 23 lbs./cu.ft.
Thickness	: 0.405"
Product Dimensions	: 54" x 30' (15 sy.)
Colour	: Green
Material Content	: Made with Synthetic Rubber
Design Configuration	: Textured / Flat
Approx. Shipping Wt.	: 115 lbs. per roll
Antimicrobial	: Guardian™
Moisture Resistant	: 98%
StainSTOP™	: Yes
Indoor Air Quality	: CRI Green Label Plus-certified

FLAME CERTIFICATION

Pill Test	: Pass (DOC-FF 1-70)
-----------	----------------------

THERMAL INSULATION

R-Value	: 0.68
---------	--------

PRODUCT FEATURES

Full House offers noticeable luxury and comfort to any carpeted space and is recommended for upgraded guestrooms, suites, retail space, stairs, professional offices and residential use.

Conventional stretch-in only.



BERBER SUPREME™



SPECIFICATION DATA

Product Code	: BV0153
Product Name	: Berber Supreme™
Material Weight	: 90 oz./sq.yd.
Density	: 23 lbs./cu.ft.
Thickness	: 0.350"
Product Dimensions	: 54" x 30' (15 sy.)
Colour	: Red
Material Content	: Made with Synthetic Rubber
Design Configuration	: Textured / Flat
Approx. Shipping Wt.	: 90 lbs. per roll
Antimicrobial	: Guardian™
Moisture Resistant	: 98%
StainSTOP™	: Yes
Indoor Air Quality	: CRI Green Label Plus-certified

FLAME CERTIFICATION

Pill Test	: Pass (DOC-FF 1-70)
-----------	----------------------

THERMAL INSULATION

R-Value	: 0.59
---------	--------

PRODUCT FEATURES

Berber Supreme provides noticeable luxury and comfort to any carpeted space. Berber Supreme is recommended for upgraded guest rooms, suites, retail space, stairs, professional offices, condominiums, or residential use.

Conventional stretch-in only.



HORIZON™ 60



SPECIFICATION DATA

Product Code	: BV0134
Product Name	: Horizon™ 60
Material Weight	: 60 oz./sq.yd.
Density	: 18 lbs./cu.ft.
Thickness	: 0.295"
Product Dimensions	: 54" x 40' (20 sy.)
Colour	: Bright Green
Material Content	: Made with Synthetic Rubber
Design Configuration	: Rippled
Approx. Shipping Wt.	: 80 lbs. per roll
Antimicrobial	: Guardian™
Moisture Resistant	: 98%
StainSTOP™	: Yes
Indoor Air Quality	: CRI Green Label Plus-certified

FLAME CERTIFICATION

Pill Test : Pass (DOC-FF 1-70)

THERMAL INSULATION

R-Value : 0.40

PRODUCT FEATURES

This unique design provides comfort and durability and is recommended for standard guest rooms, offices, residential or general use.

Conventional stretch-in only.





SPECIFICATION DATA

Product Code	: BV0092
Product Name	: Onyx™
Material Weight	: 56 oz./sq.yd.
Density	: 20 lbs./cu.ft.
Thickness	: 0.250"
Product Dimensions	: 54" x 60' (30 sy.)
Colour	: Black
Material Content	: Made with Synthetic Rubber
Design Configuration	: Textured / Flat
Approx. Shipping Wt.	: 110 lbs. per roll
Antimicrobial	: Guardian™
Moisture Resistant	: 98%
StainSTOP™	: Yes
Indoor Air Quality	: CRI Green Label Plus-certified

FLAME CERTIFICATION

Pill Test	: Pass (DOC-FF 1-70)
-----------	----------------------

THERMAL INSULATION


R-Value	: 0.25
---------	--------

PRODUCT FEATURES

This low-profile cushion provides comfort as well as superb carpet support. It is recommended for standard guest rooms, offices, residential or general use.

Conventional stretch-in only.



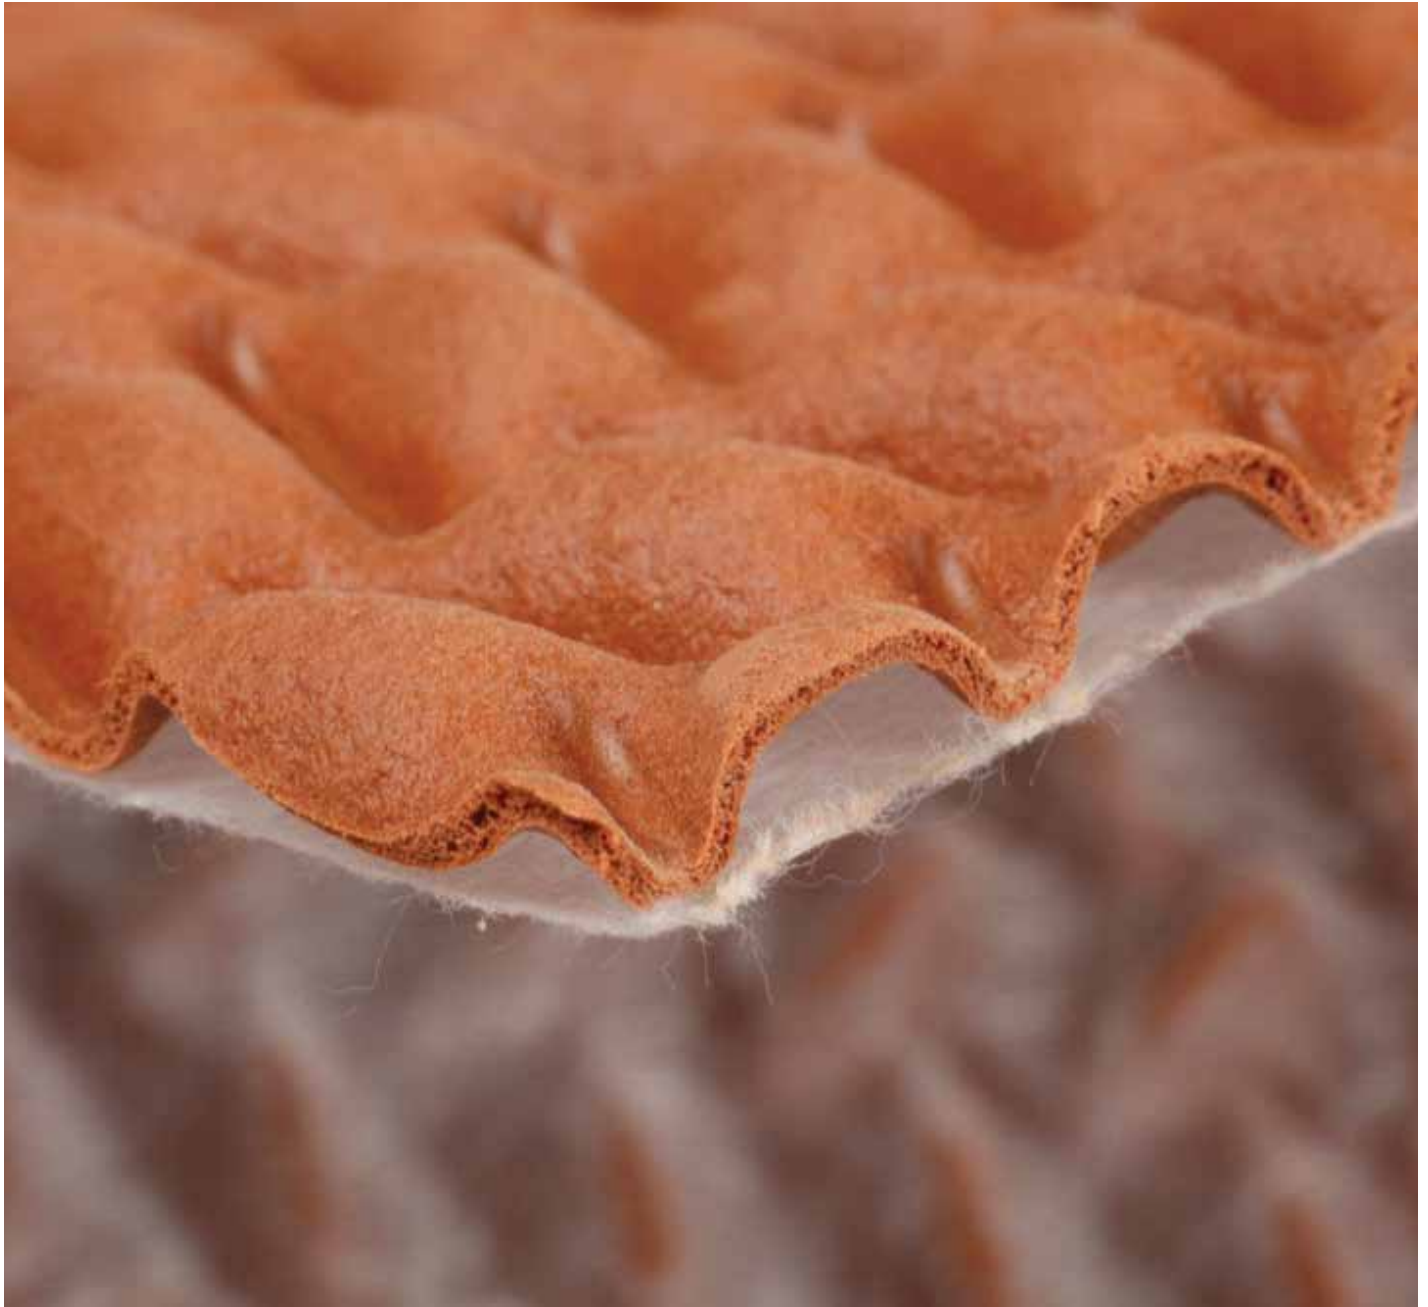

SPECIFICATION DATA

Product Code	: BV0084
Product Name	: Badger™
Material Weight	: 50 oz./sq.yd.
Density	: 12 lbs./cu.ft.
Thickness	: 0.295"
Product Dimensions	: 54" x 60' (30 sy.)
Colour	: Red
Material Content	: Made with Synthetic Rubber
Design Configuration	: Rippled
Approx. Shipping Wt.	: 94 lbs. per roll
Antimicrobial	: Guardian™
Moisture Resistant	: 98%
StainSTOP™	: Yes
Indoor Air Quality	: CRI Green Label Plus-certified

FLAME CERTIFICATION

Pill Test	: Pass (DOC-FF 1-70)
-----------	----------------------

THERMAL INSULATION

R-Value : 0.23

PRODUCT FEATURES

Badger is recommended for standard guest rooms, apartments, offices or general use.

Conventional stretch-in only.

