

Classic 40

HETEROGENOUS COMPACT VINYL

Harmonious
colors for
warm and
cozy interiors



4M ROLL



Powered by



 **Tarkett**

HARMONY OAK Light Grey 5618 046



ROCK Warm Grey 5618 037, ANTIA Black 5618 011

Classic 40 is a refreshing collection of designs to create warm and comfortable ambiances for the home. Select from a choice of 22 timeless and modern decors including mineral inlays, precious stones and wood effects. The collection offers great value while lending a home-like and cozy feel to spaces and also ensuring comfort and durability. Classic 40 is available in 4 meter, allowing for seamless installation to suit any space.

phthalate free



100%



Residual indentation
to acoustic ratio

0.10mm / 13dB



22 decors



Durable

0.40mm
wearlayer



4m
rolls for installation



Easy maintenance

TopClean™ PUR
No wax, no polish

Classic 40

TEAK



Brown 5618 005

BEECH



Natural 5618 001

GEA



Smoked Grey 5618 040

GEA



Light Warm Grey 5618 025

GEA



Light Brown 5618 003

Classic 40



HARMONY OAK




Cold Grey 5618 043

HARMONY OAK



Light Grey 5618 046

HARMONY OAK

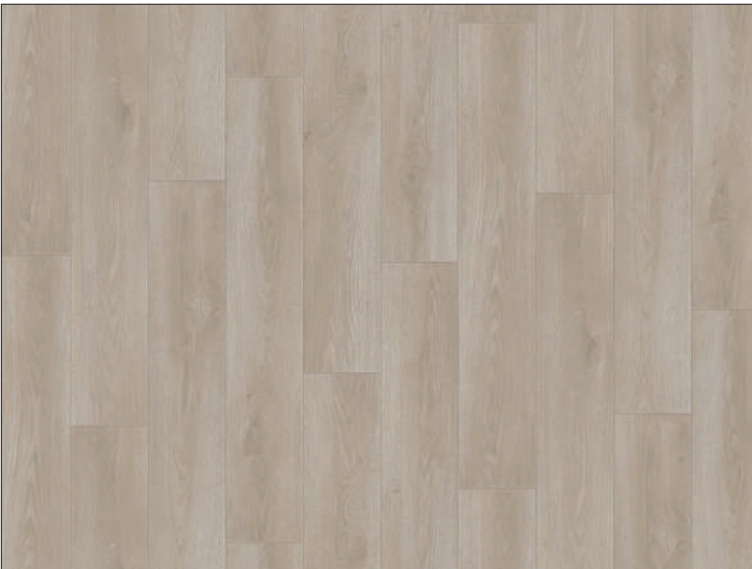

Natural 5618 044

HARMONY OAK



Warm Beige 5618 047

HARMONY OAK



Light Brown 5618 042

HARMONY OAK



Warm Brown 5618 045



ANTIA Black 5618 011



ROCK Warm Beige 5618 038

Classic 40

APUNARA



White 5618 050

APUNARA



Natural 5618 051

APUNARA




Light Grey 5618 049

APUNARA



Grey 5618 048

CANADIAN PINE

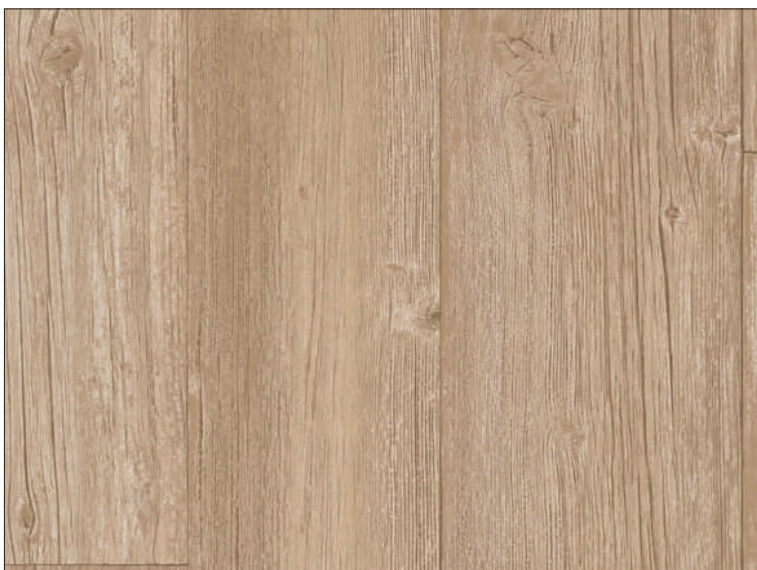

Warm Beige 5618 054

CANADIAN PINE



Silk Grey 5618 053

Classic 40



ROCK



Warm Beige 5618 **038**

ROCK



Grey Black 5618 **020**

ROCK



Warm Grey 5618 **037**

ROCK



Smoked 5618 **039**

ANTIA



Black 5618 **011**

Classic 40

| TECHNICAL DATA | STANDARD | CLASSIC 40 | |
|---|------------------------|--|------------------------|
| CLASSIFICATION | | | |
| Classification | EN ISO 10582 | Heterogeneous compact floor covering based on polyvinyl chloride | |
| | EN ISO 10874 | Commercial: 32 | |
| Wear layer binder content | EN ISO 10582 | Type I | |
| TECHNICAL CHARACTERISTICS | | | |
| Wear layer thickness | EN ISO 24340 | 0.40 mm | |
| Total thickness | EN ISO 24346 | 2.0 mm | |
| Total weight | EN ISO 23997 | 2150 g/m ² | |
| PU treatment | EN ISO 23997 | TopClean™ | |
| Form of delivery | EN ISO 24341 (rolls) | approx. 25 running metres x 4 m | |
| PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 14041) | | | |
| Declaration of Performance | EN 14041 | 0131-0005-DOP-2018-10 | |
| Reaction to fire | EN 13501-1 | C _f -s1 | |
| Electrostatic properties | EN 1815 | ≤ 2 kV on concrete | |
| Thermal resistance | EN ISO 10456 | 0.02 m ² K/W | |
| Slip resistance | EN 13893 | μ ≥ 0,3 | |
| TECHNICAL PERFORMANCES | | | |
| Static indentation | EN ISO 24343-1 | ≤ 0.10 mm | |
| Impact sound reduction | NF EN ISO 717 / 2 | ΔL _W = 13 dB | |
| Slip resistance ⁽¹⁾ | DIN 51130 | R10 | |
| Castor chair | ISO 4918 | No damage | |
| Curl resultant to heat | EN ISO 23999 | ≤ 8 mm | |
| Light fastness | EN ISO 105-B02 | ≥ 6 | |
| Dimensional stability | EN ISO 23999 | ≤ 0.40% | |
| Chemical resistance | EN ISO 26987 | Not affected (0) | |
| Underfloor heating | | Suitable | |
| ENVIRONMENTAL PERFORMANCES | | | |
| Total VOC emissions | ISO 16000-9 | ≤ 100 μg/m ³ (after 28 days) | |
| COLOURS | | | |
| 22 (Wood: 17, Rock: 4, Antia: 1) | | | |
|  | | | |
| <div style="display: flex; justify-content: space-between; align-items: flex-start;"> <div style="width: 60%;"> <p>APUNARA Natural 5618 049</p> </div> <div style="width: 35%;">  </div> </div> | | | |
| Colour N° | Welding rods N° | Colour N° | Welding rods N° |
| 5618 037 | 1287 341 | 5618 046 | 1287 341 |
| 5618 038 | 1292 435 | 5618 043 | 1287 530 |
| 5618 039 | 1287 308 | 5618 044 | 1287 378 |
| 5618 020 | 1287 591 | 5618 047 | 1287 474 |
| 5618 050 | 1292 150 | 5618 042 | 1287 501 |
| 5618 048 | 1287 537 | 5618 045 | 1287 675 |
| 5618 049 | 1287 536 | 5618 001 | 1294 852 |
| 5618 051 | 1287 690 | 5618 054 | 1287 174 |
| 5618 025 | 1287 707 | 5618 053 | 1287 427 |
| 5618 003 | 1294 315 | 5618 005 | 1287 287 |
| 5618 040 | 1287 537 | 5618 011 | 1287 585 |

Powered by



MADE IN LUXEMBOURG

Tarkett