




CLASSIC 40

HETEROGENOUS COMPACT VINYL

WESTWING OAK Brown
240010030

POWERED BY



 **Tarkett**

HARMONIOUS COLORS FOR
WARM AND COZY INTERIORS

WESTWING OAK Brown
240010030

WESTWING OAK Grey
240010032

SOFT ELM Authentic
240010034

SOFT ELM Caramel
240010033


GEA Light Brown
5618003

GEA Light Warm Brown
5618025

SOFT ELM Caramel
240010033



SOFT ELM Caramel
240010033

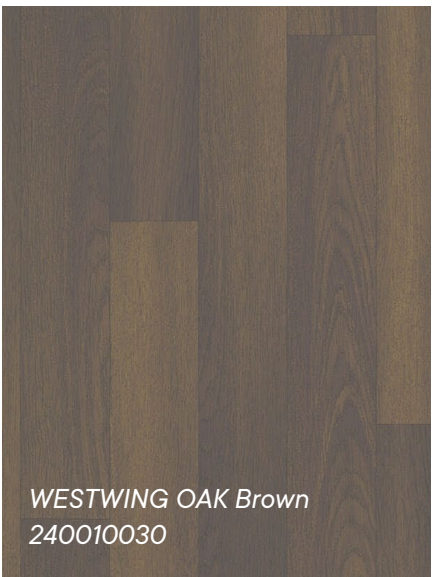

WESTWING OAK Brown
240010030



WESTWING OAK Grey
240010032



SOFT ELM Caramel
240010033



GEA Light Brown
5618003



SOFT ELM Authentic
240010034



GEA Light Brown
5618003



GEA Light Warm Brown
5618025





GEA Light Warm Brown
5618025



SOFT ELM Authentic
240010034



TENDENZA Light Grey
240010025



TENDENZA Dark Grey
240010026



TENDENZA Light Grey
240010025



TENDENZA Dark Grey
240010026



TENDENZA Cool Grey
240010 024



TENDENZA Cool Grey
240010024



ROCK Grey Black
5618020



ROCK Grey Black
5618020



4M ROLL



Classic 40 is a refreshing collection of designs to create warm and comfortable ambiances for the home. Select from a choice of 22 timeless and modern decors including mineral inlays, precious stones and wood effects. The collection offers great value while lending a home-like and cozy feel to spaces and also ensuring comfort and durability. Classic 40 is available in 4 meter, allowing for seamless installation to suit any space.

DESIGNED TO PERFORM MADE TO LAST

Superior performance. Effortless living.
Every detail, made better.



4m

ROLLS FOR INSTALLATION



Phthalate free
100%



11

DECORS



RESIDUAL INDENTATION
TO ACOUSTIC RATIO

0.10 mm / **13** dB



Durable

0.40 mm

WEARLAYER



Easy maintenance

TOPCLEAN PUR

No wax, no polish

Datasheet

Classification	Norm	Tarkett Value
Product type	EN ISO 26986	Heterogeneous poly(vinyl chloride) floor coverings
Domestic classification	EN ISO 10874	23 Heavy
Commercial classification	EN ISO 10874	32 General
Industrial classification	EN ISO 10874	41 Moderate
Binder content	ISO 11638	Type I
Technical Characteristics	Norm	Tarkett Value
Total thickness	ISO 24346	2 mm
Wear layer thickness	ISO 24340	0,40 mm
Total weight	ISO 23997	2150 g/m²
Performance for CE Marking	Norm	Tarkett Value
Declaration of Performance #	EN 14041	0007-0070-DoP-2024-10
Reaction to fire	EN 13501-1	Cfl-s1
Slip resistance (EN 13893)	EN 13893	Class DS ($\mu \geq 0,30$)
Slip resistance	DIN 51130	R10
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)
Thermal resistance	ISO 10456	0,020 m²•K/W
Technical Performance	Norm	Tarkett Value
Residual indentation	EN ISO 24343-1	$\leq 0,10$ mm
Castor chair	ISO 4918	No damage after 25000 cycles
Furniture leg	EN 424	No damage
Impact sound reduction - ΔL_w	EN ISO 717-2	13 dB
Light fastness	ISO 105-B02	≥ 6
Chemical resistance	ISO 26987	Not affected
Underfloor heating		Suitable (subfloor temperature maximum 27°C)
Dimensional stability	EN ISO 23999	≤ 0.40 %
Curl resultant to heat	ISO 23999	$\leq 8 $ mm
Sustainability performances	Norm	Tarkett Value
Recyclability through ReStart®		Offcuts / Post-use - Contact Tarkett for more information
Recycled content		26 %
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)		5,95 kg CO ₂ eq /m²
Total VOC Emissions (after 28 days)	EN 16516	Gold (≤ 100 µg / m³)
Formaldehyde emission		E1
Dimensions and designs		
Roll		Roll 4 x 25 m
Number of designs available		11



POWERED BY



MADE IN
LUXEMBOURG

