

Eclipse Premium Classic

HOMOGENEOUS COMPACT VINYL

Combine
& Create

Powered by



 **Tarkett**

Eclipse Premium Classic




White Beige

21020 808



Medium Warm Beige

21020 036

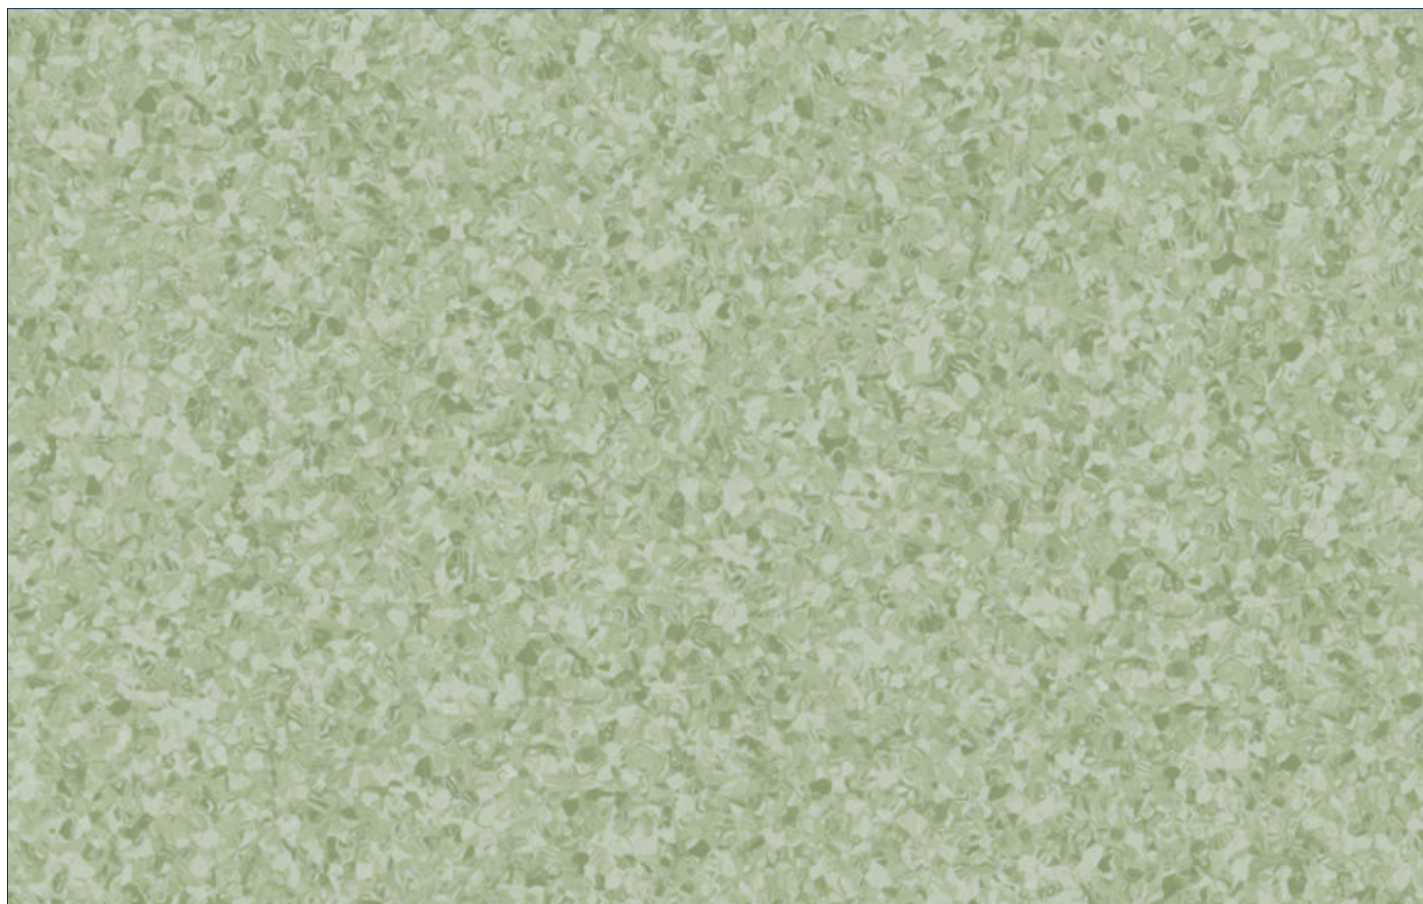

Medium Green

21020 010

Eclipse Premium Classic



Medium Gold

21020 004



Eclipse Premium Classic




Light Pure Grey

21020 038



Medium Pure Grey

21020 039

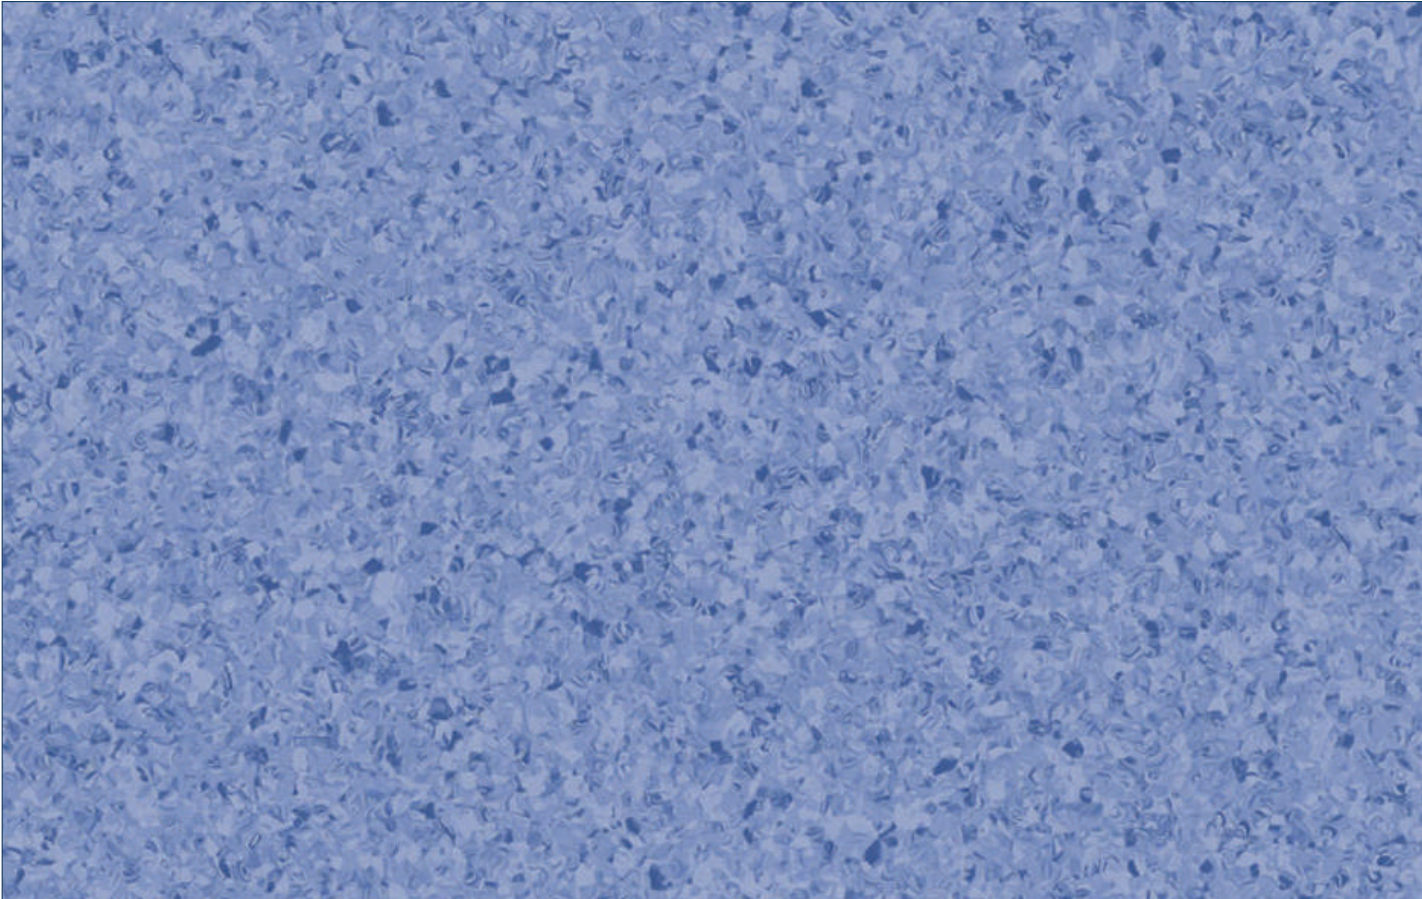

Medium Blue

21020 730

Eclipse Premium Classic



Medium Grey

21020 040



Coordinated Welding rods

Colours	Colour Code	Welding Rods Multicolours
Medium Gold	21020004	1290 270
Medium Green	21020010	1290 265
Medium Warm Beige	21020036	1290 264
Light Pure Grey	21020038	1290 262
Medium Pure Grey	21020039	1290 028
Medium Grey	21020040	1290 189
Medium Blue	21020730	1290 197
White Beige	21020808	1290 374

Eclipse Premium Classic

TECHNICAL DATA	STANDARD	ECLIPSE PREMIUM CLASSIC
CLASSIFICATION		
Classification	ISO 10581	Homogeneous vinyl flooring
	EN ISO 10874	34-43
Wear layer binder content	ISO 10581	Type I
TECHNICAL CHARACTERISTICS		
Total thickness	EN ISO 24346	2.0 mm
Total weight	EN ISO 23997	3000 g/m ²
Surface treatment		PUR reinforced
Form of delivery	EN ISO 24341 Sheet (rolls)	Approx. 23 r m x 200 cm art. no. 21020 __ __
PERFORMANCE FOR CE MARKING REQUIREMENTS (EN 14041)		
Declaration of Performance	EN 14041	0019-0020-DoP-2013-07
Reaction to fire	EN 13501-1	Class B _n -S1
	EN ISO 9239-1	≥ 8 kW/m ²
	EN ISO 11925-2	Pass
Electrostatic properties	EN 1815	< 2 kV
Thermal resistance	EN 12667/DIN 52612	Approx. 0.01 m ² K/W
Slip resistance	EN 13893	≥ 0.3
	BS 7976-2	Low risk of slip
TECHNICAL PERFORMANCES		
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm Average measured value: 0.03 mm
Slip resistance	DIN 51130	R9
Clean room test	ASTM F24 F51	Class A
Ease of decontamination	ISO 8690	Good
Bacteria resistance	EN ISO 846: Part C	Does not favour growth
Chemical resistance	ISO 26987	Good resistance
Castor Chair	ISO 4918	Suitable
Flexibility	ISO 24344	Pass
Dimensional stability	EN ISO 23999	≤ 0.40% for rolls
Light fastness	EN ISO 105-B02	≥ 6
Seam strength	EN 684	Individual values : ≥ 400 N/50 mm
Underfloor heating		Suitable - max. 27°C
ENVIRONMENTAL PERFORMANCES		
Total VOC emissions	ISO 16000-9	≤ 10µg/m ³ (after 28 days)
	Indoor air quality	Platinum
COLOURS		

8

The above information is subject to modification for the benefit of further improvement.
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.



Powered by



MADE IN SWEDEN

