


Primo Premium

HOMOGENEOUS COMPACT VINYL

Combine
& Create



Powered by



 **Tarkett**

Primo Premium




Light Beige

21010 **678**



Medium Cool Beige

21010 **657**

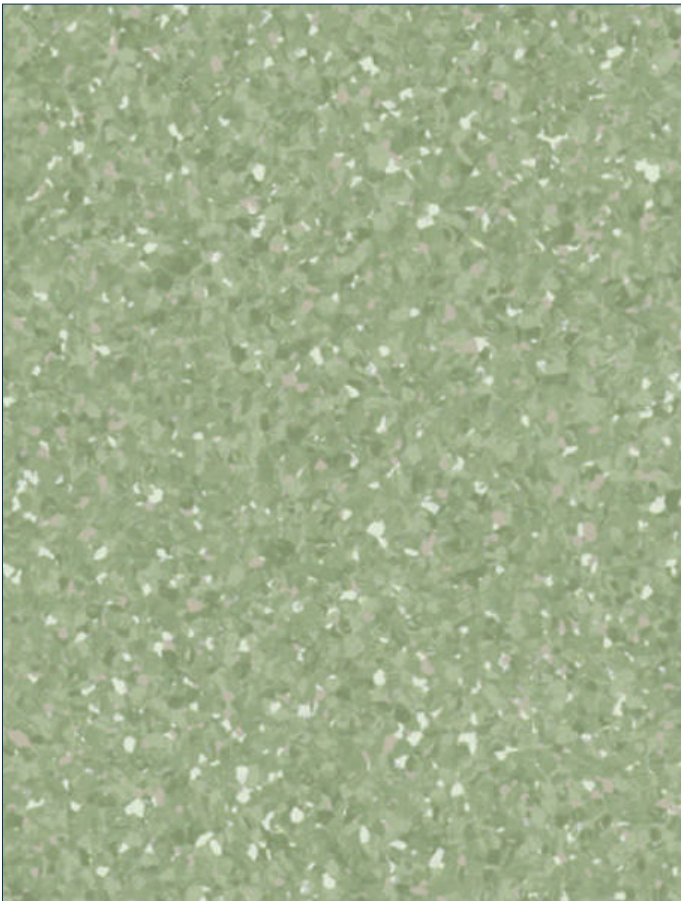

Medium Green

21010 **680**



Primo Premium



Light Pure Grey

21010 **651**




Medium Cool Grey

21010 **673**




Primo Premium

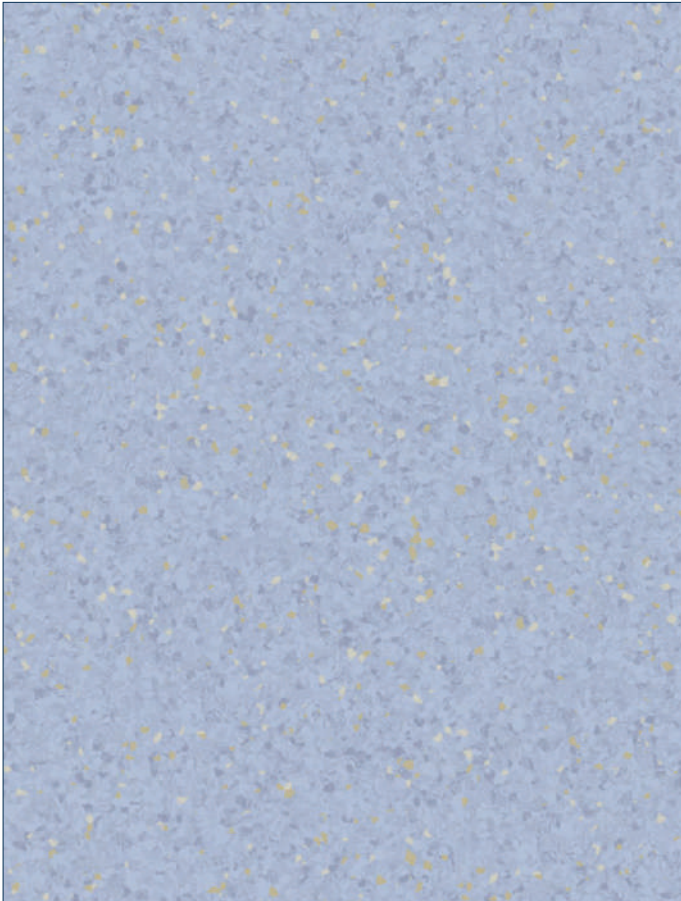


Light Blue

21010 **682**

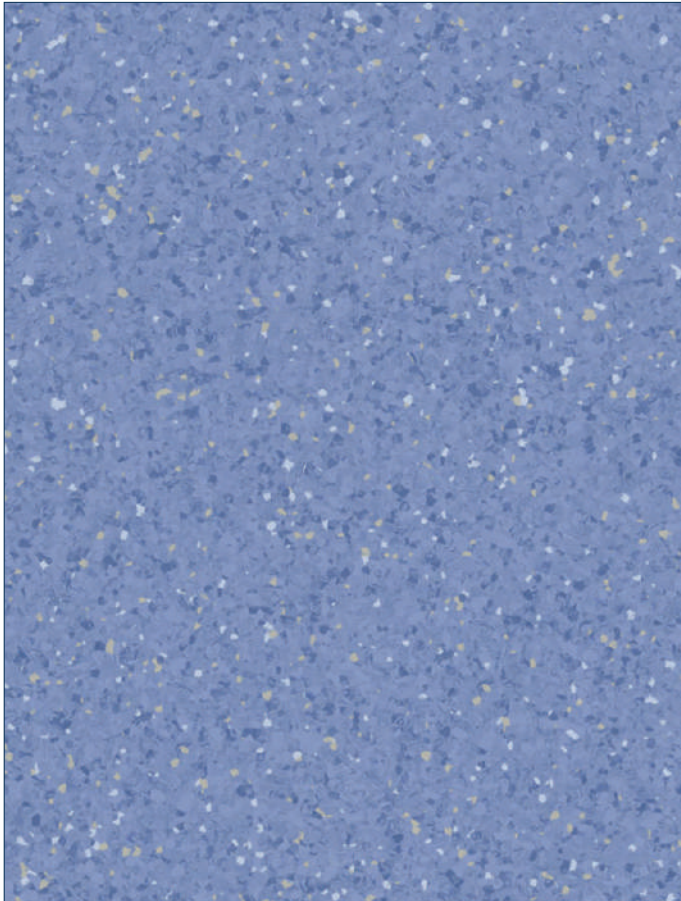

Medium Blue


21010 **665**

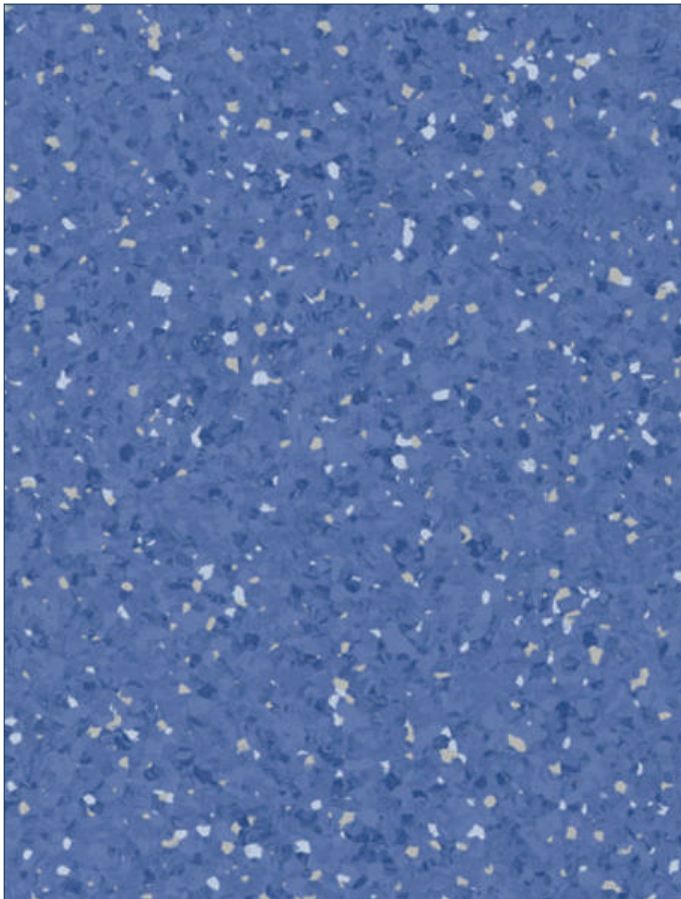

Dark Blue

21010 **666**

Primo Premium

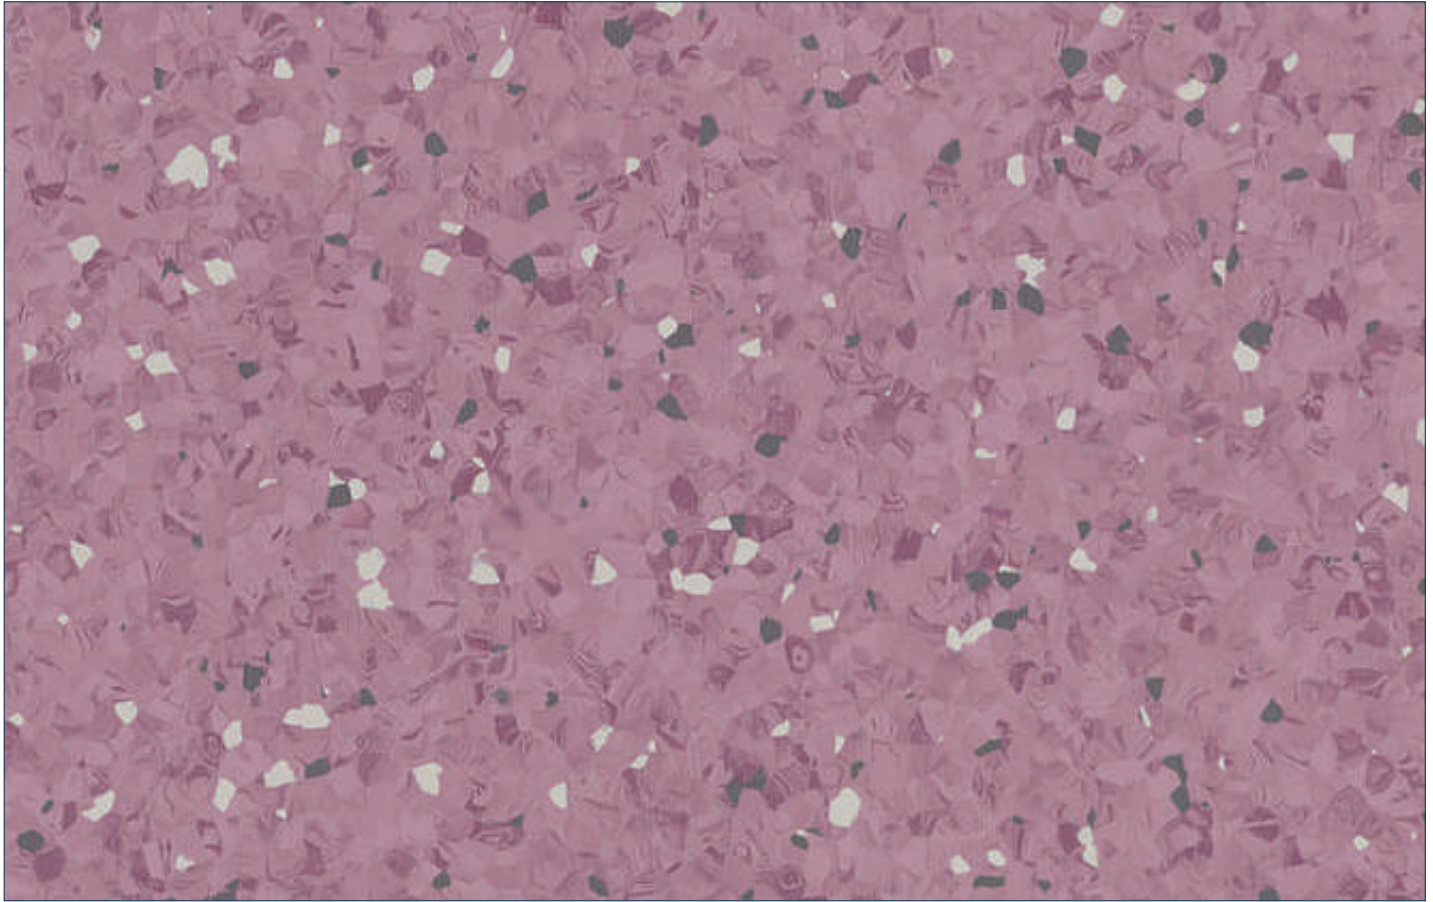

Soft Purple

21010 663

Coordinated Welding rods

Colours	Colour Code	Welding Rods Multicolours
Light Pure Grey	21010651	1290 152
Medium Cool Beige	21010657	1290 158
Medium Blue	21010665	1290 164
Dark Blue	21010666	1290 165
Medium Cool Grey	21010673	1290 225
Light Beige	21010678	1290 232
Medium Green	21010680	1290 059
Light Blue	21010682	1290 234
Soft Purple	21010663	1290 386

Primo Premium

TECHNICAL DATA	STANDARD	PRIMO PREMIUM
CLASSIFICATION		
Classification	ISO 10581	Homogeneous vinyl flooring
	EN ISO 10874	34-43
Wear layer binder content	ISO 10581	Type I
TECHNICAL CHARACTERISTICS		
Total thickness	EN ISO 24346	2.0 mm
Total weight	EN ISO 23997	3000 g/m ²
Surface treatment		PUR reinforced
Form of delivery	EN ISO 24341 Sheet (rolls)	Approx. 23 m x 200 cm art. no. 21010 _ _ _
PERFORMANCE FOR CE MARKING REQUIREMENTS (EN 14041)		
Declaration of Performance	EN 14041	0019-0018-DoP-2013-07
Reaction to fire	EN 13501-1	Class B _s -S1
	EN ISO 9239-1	≥ 8 kW/m ²
	EN ISO 11925-2	Pass
Electrostatic properties	EN 1815	< 2 kV
Thermal resistance	EN 12667/DIN 52612	Approx. 0.01 m ² K/W
Slip resistance	EN 13893	≥ 0.3
	BS 7976-2	Low risk of slip
TECHNICAL PERFORMANCES		
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm Average measured value: 0.03 mm
Slip resistance	DIN 51130	R9
Clean room test	ASTM F24 F51	Class A
Ease of decontamination	ISO 8690	Good
Bacteria resistance	EN ISO 846: Part C	Does not favour growth
Chemical resistance	ISO 26987	Good resistance
Castor Chair	ISO 4918	Suitable
Flexibility	ISO 24344	Pass
Dimensional stability	EN ISO 23999	≤ 0.40% for rolls
Light fastness	EN ISO 105-B02	≥ 6
Seam strength	EN 684	Individual values : ≥ 400 N/50 mm
Underfloor heating		Suitable - max. 27°C
ENVIRONMENTAL PERFORMANCES		
Total VOC emissions	ISO 16000-9 Indoor air quality	≤ 10µg/m ³ (after 28 days) Platinum
COLOURS		

9

The above information is subject to modification for the benefit of further improvement.
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.



Powered by



MADE IN SWEDEN

