


ICONIK 450

VINYL ROLLS




ICONIK 450

VINYL ROLLS

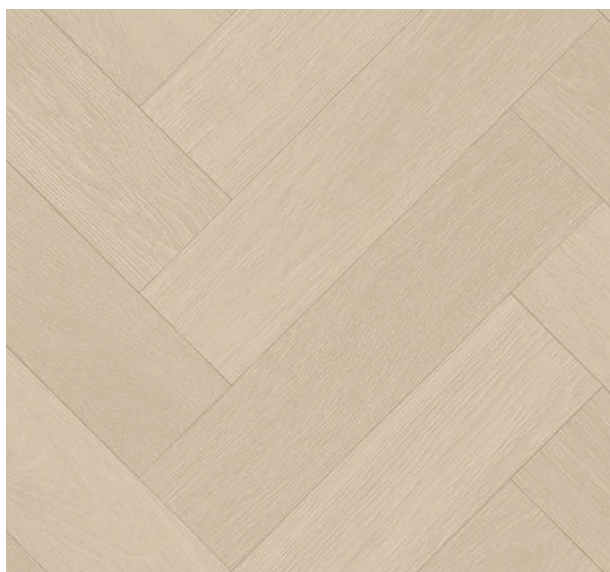


Ancares Herringbone Beige - 5203108

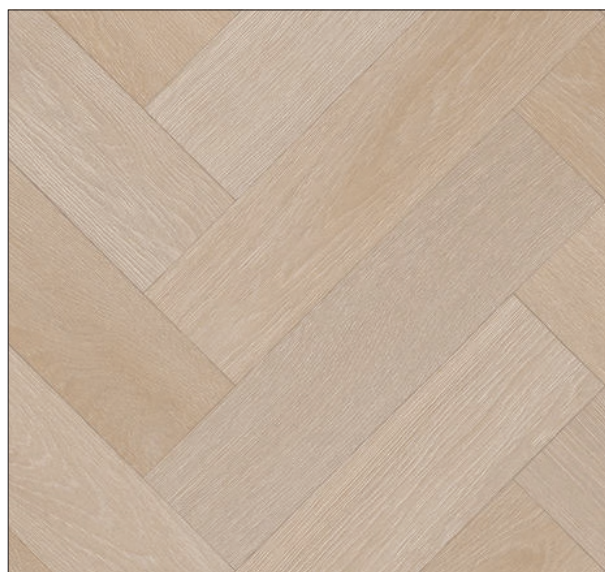


Ancares Herringbone Grege - 5203109



Agrego GREGE - 5203045

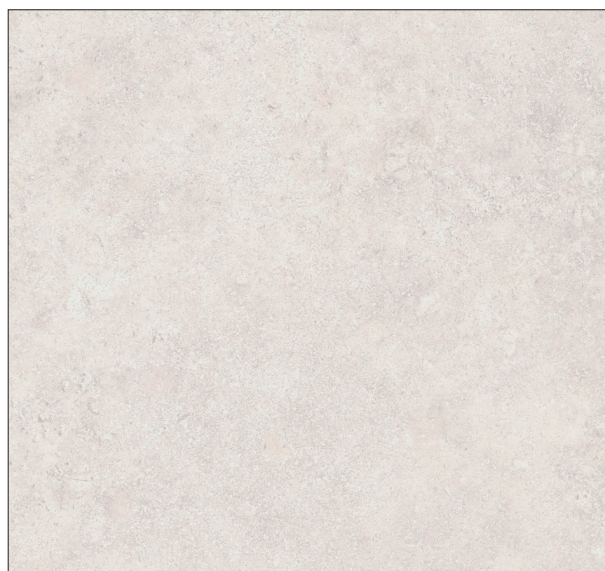

Agrego WHITE - 5203064

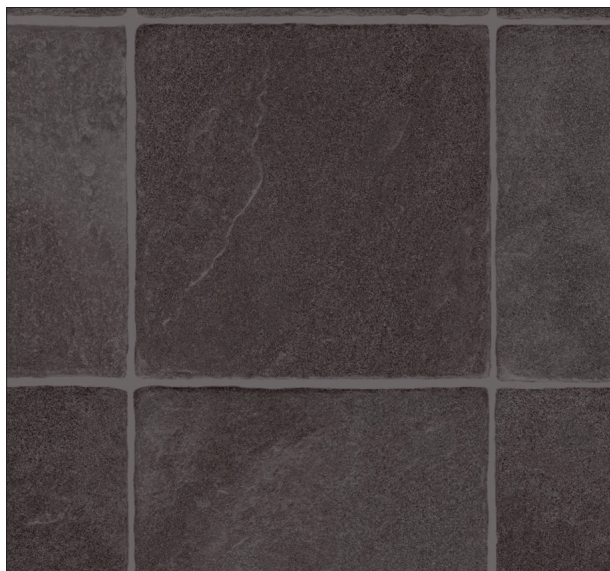

Granit CARBON - 5203058




Granit GREGE - 5203059

ICONIK 450

VINYL ROLLS



Kaolin DARK GREGE - 5203094

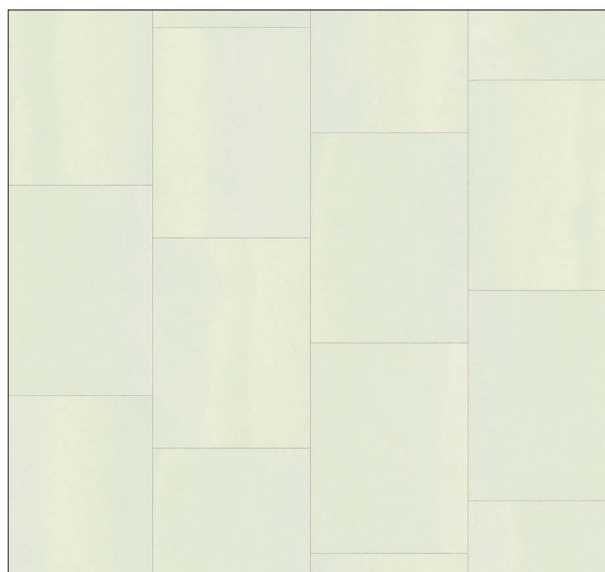

Kaolin LIGHT GREY - 5203091




Zaragoza Tile INDIGO - 5203100



Zaragoza Tile STONE - 5203102

ICONIK 450

VINYL ROLLS

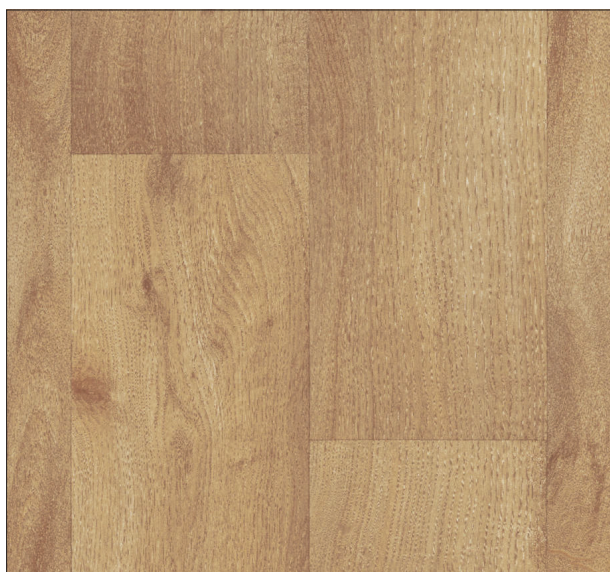

Arcadia BEIGE - 5203067



Arcadia MIDDLE BEIGE - 5203048



Authentic BEIGE - 5203069



French Oak ANTHRACITE - 5203086



French Oak GREGE - 5203107



French Oak MEDIUM BEIGE - 5203087

ICONIK 450

TECHNICAL DATA VINYL FLOORING 2020

Classification	Norm	Tarkett Value
Product type	EN ISO 26986	Expanded (cushioned) poly(vinyl chloride) floor covering Reinforced with a calendered interlayer
Domestic classification	EN ISO 10874	23 Domestic Heavy
Binder content	ISO 11638	Type I
Technical characteristics		
Total thickness	ISO 24346	4.5 mm
Wear layer thickness	ISO 24340	0,30 mm
Total weight	ISO 23997	3.000 g/m ²
Roll Width		4 + 2+ 3 m
Roll Length	EN ISO 24341	19 m
Performance for CE Marking		
Declaration of Performance #	EN 14041	0131-0009-DOP-2020-01
Reaction to fire	EN 13501-1	Cfl-s1
Slip resistance	EN 13893 DIN 51130	$\mu \geq 0,30$ (DS) R 10
Electrostatical propensity	EN 1815	< 2 kV
Thermal resistance (in m ² •K/W)	ISO 10456 / EN 12524-1	0,07
Content of Pentachlorophenol		< 5 ppm
Formaldehyde emission	EN 717-1	E1
Technical Performance		
Impact sound reduction - ΔL_w	EN ISO 717-2	20 dB
Residual indentation	ISO 24343-1	< 0,35 mm
Chemical resistance	ISO 26987	Not affected
Underfloor heating		Suitable (maximum 27°C)
Colour fastness to light	ISO 105-B02	≥ 6
Dimensional stability	ISO 23999	$\leq 0,20$ %
Sustainability, Environment & Indoor Air Quality		
Recyclable		Yes
French VOC rating		A+
Phthalate content		Phthalate-free
TVOC emissions after 28 days	EN 16516	Gold ($\leq 100 \mu\text{g} / \text{m}^3$)
Product ID		
Residential warranty (in years)		15
Surface treatment		Extreme Protection

The above information is subject to modification for the benefit of further improvement (2019-11).

