


# ICONIK 300

VINYL ROLLS



# ICONIK 300


VINYL ROLLS

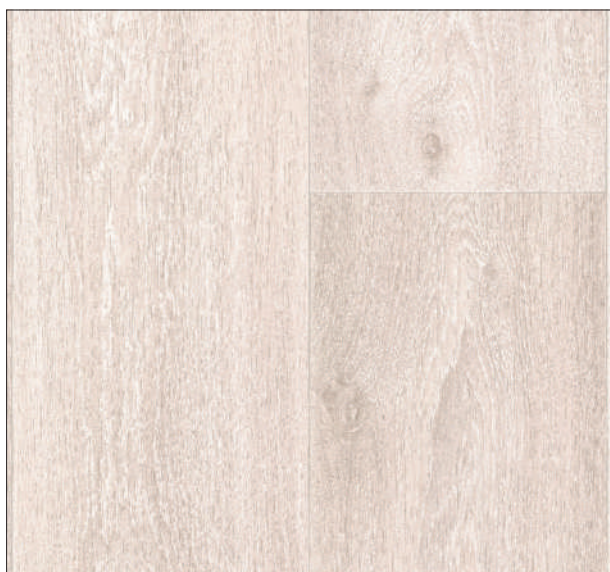


Admiral / Beige 6578081



Admiral / Grege 6578080

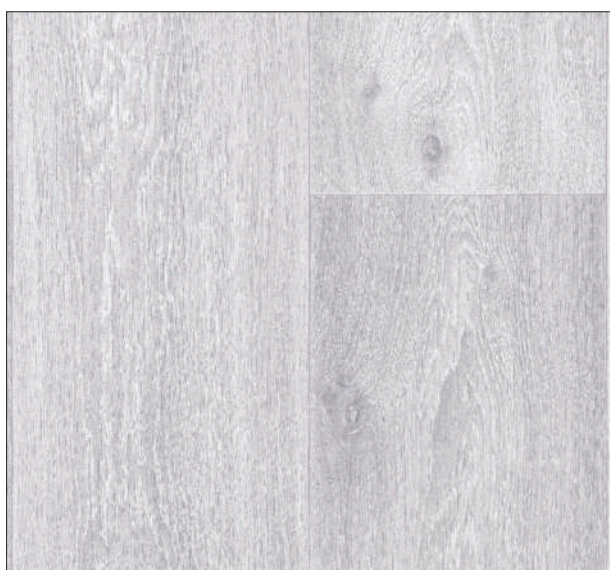

Admiral / Light Grey 6578082

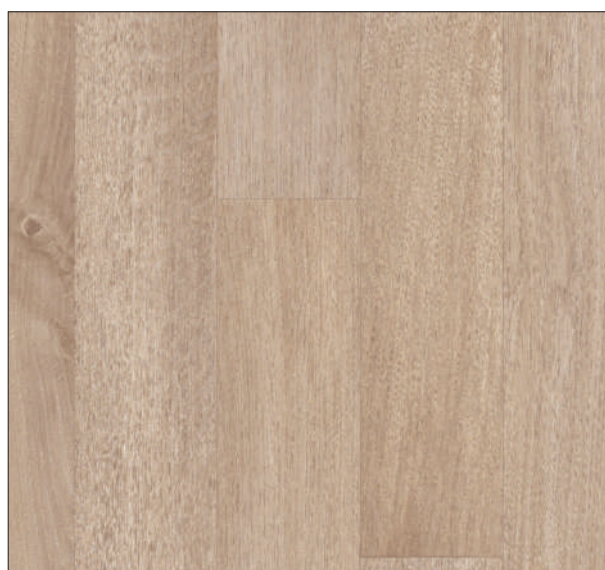

Antik Oak / Grey Beige 5208261



Arcadia / Light Beige 5208107



Arcadia / Red Brown 5208108

# ICONIK 300

VINYL ROLLS




Authentic / Natural Brown 5208267



Authentic / White 5208266



Beech / Beige 5208191

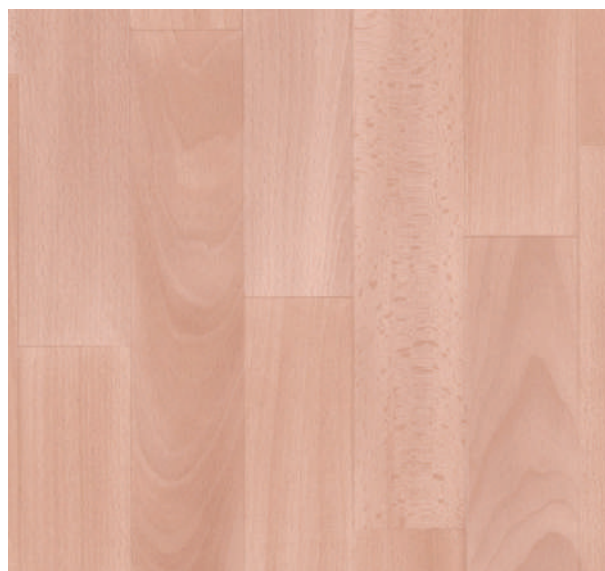

Beech / Beige Yellow 5208105



Faro / Dark Grey 5208262



Gordon / Red Brown 5208206

# ICONIK 300

VINYL ROLLS




Idia / Beige Brown 5208112




Meleze / Natural Yellow 5208264



Meleze / White 5208165

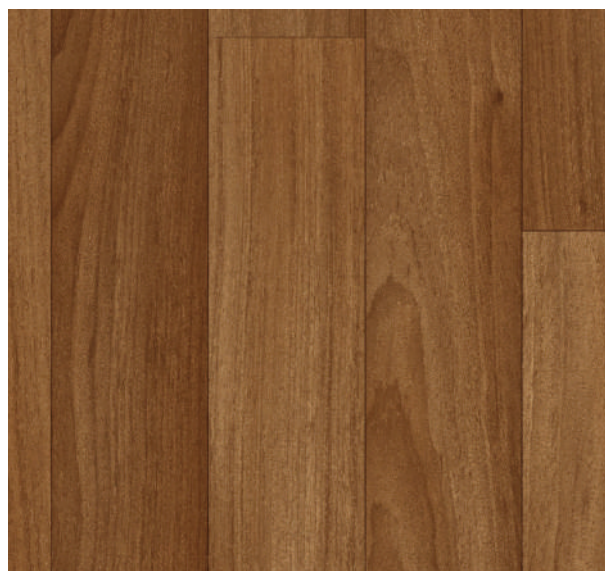

Pear / Dark 5208163

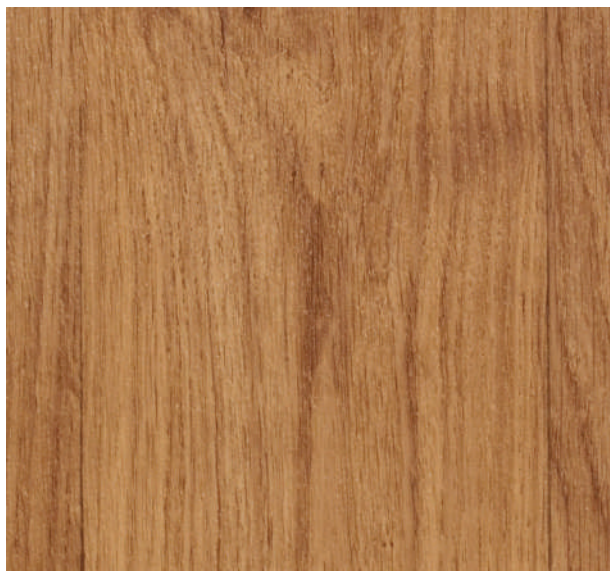

Sherwood / Clair 6761010



Sherwood / Grege 6578073

# ICONIK 300

VINYL ROLLS



Swan / Grey 5208280



Swan / Light Grege 5208281



Admiral / Beige 6578081

## TECHNICAL DATA VINYL FLOORING 2020

Classification	Norm	Tarkett Value
Product type	EN ISO 26986	Expanded (cushioned) poly(vinyl chloride) floor covering
Domestic classification	EN ISO 10874	23/31 Domestic Heavy/ Commercial Moderate
Binder content	ISO 11638	Type I
Technical characteristics		
Total thickness	ISO 24346	3.0 mm
Wear layer thickness	ISO 24340	0,25 mm
Total weight	ISO 23997	1.840 g/m <sup>2</sup>
Roll Width		4 m
Roll Length	EN ISO 24341	25 m
Performance for CE Marking		
Declaration of Performance #	EN 14041	0131-0002-DOP-2020-01
Reaction to fire	EN 13501-1	Cfl-s1
Slip resistance	EN 13893 DIN 51130	> 0,30 R 10
Electrostatical propensity	EN 1815	< 2 kV
Thermal resistance (in m <sup>2</sup> •K/W)	ISO 10456 / EN 12524-1	0,05
Formaldehyde emission	EN 717-1	E1
Technical Performance		
Impact sound reduction - ΔLw	EN ISO 717-2	20 dB
Residual indentation	ISO 24343-1	0.18 (best measured value)
Chemical resistance	ISO 26987	Not affected
Underfloor heating		Suitable (maximum 27°C)
Colour fastness to light	ISO 105-B02	≥ 6
Dimensional stability	ISO 23999	≤ 0,20 %
Sustainability, Environment & Indoor Air Quality		
Recyclable		Yes
French VOC rating		A+
Phthalate content		Phthalate-free
TVOC emissions after 28 days	EN 16516	Gold (≤ 100 µg / m <sup>3</sup> )
Product ID		
Residential warranty (in years)		10
Surface treatment		Extreme Protection

The above information is subject to modification for the benefit of further improvement (2020-01).

