


STRIKE!



Strike 877 - Brick

Structured Loop
Carpet Tiles
50 x 50 cm


TEK Sol
FLOORING EXPERTS




STRIKE!



Strike 777 - Brick




477

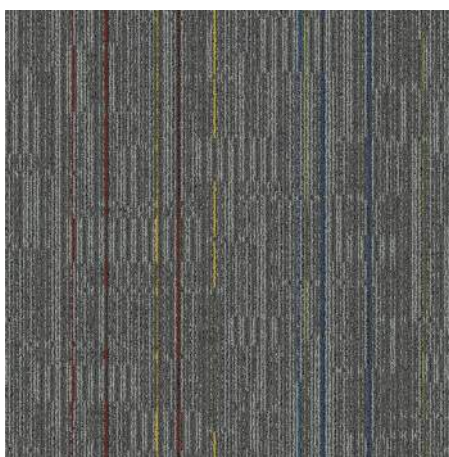


577




647

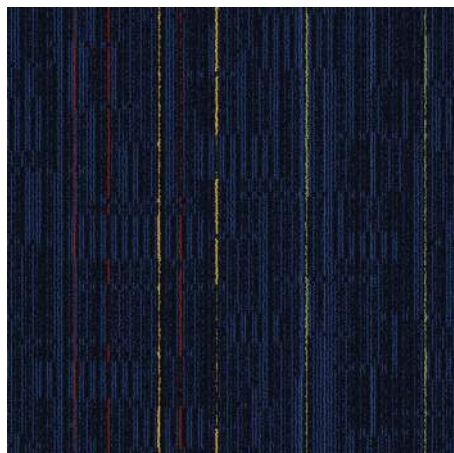

657

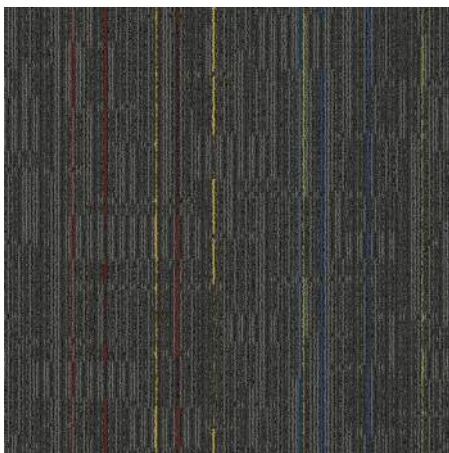

777

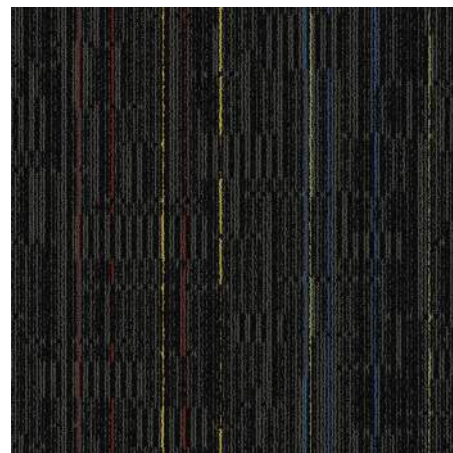

877

STRIKE!




Strike 477 - Quarter Turn



Strike 477 - Brick

Structured Loop
Carpet Tiles
50 x 50 cm


TEK Sol
FLOORING EXPERTS



STRIKE!




Strike 777 - Quarter Turn



Strike 877 - Quarter Turn

Structured Loop
Carpet Tiles
50 x 50 cm



STRIKE!



Strike 657 - Quarter Turn



Strike 657 - Brick

Structured Loop
Carpet Tiles
50 x 50 cm



STRIKE!




Strike 577 - Quarter Turn



Strike 577 - Brick

Structured Loop
Carpet Tiles
50 x 50 cm



STRIKE!




Strike 647 - Quarter Turn



Strike 647 - Brick

Structured Loop
Carpet Tiles
50 x 50 cm



STRIKE!

Product Specification:

Style	:	Strike!
Construction	:	Loop Pile full repeat scroll
Pile Fiber Composition	:	100% Olefin PP
Yarn Type	:	BCF
Dye Method	:	Solution Dyed
Gauge	:	1/12"
Pile Height	:	3.00mm/6.50mm
Pile Weight	:	800g/m ²
Total Weight	:	5065g/m ²
Primary Backing	:	PES/PA Fleece (Non woven Textile)
Secondary Backing	:	PVC reinforced by Glass Fiber
Total Thickness	:	8.00mm
Number of Tufts	:	237000/m ² (Approx)
Tile Size	:	50 x 50cm
Area of use	:	Commercial
Packing	:	20pcs/carton (5m ²)

Performance Specification:

Flammability	:	ASTM D-2859/FFI-70/16CFR 1630 Pass 8/8
Smoke Density	:	ASTM E662 Less than 450
Static Propensity	:	AATCC - 134 under 3.5 KV
Colour Fastness	:	5:5 on Grey Scale
Soiling Propensity	:	AATCC123 Grey Scale 5
Dimensional Stability	:	DXN 54318 6.20



Sound
Insulation



Heat
Insulation



Anti-static




Colorfast




Wearproof



Anti-
flammability



Quarter Turn



Brick

**Structured Loop
Carpet Tiles
50 x 50 cm**

