


THE LANDSCAPE GRASS COLLECTION



GREEN DIAMOND 35

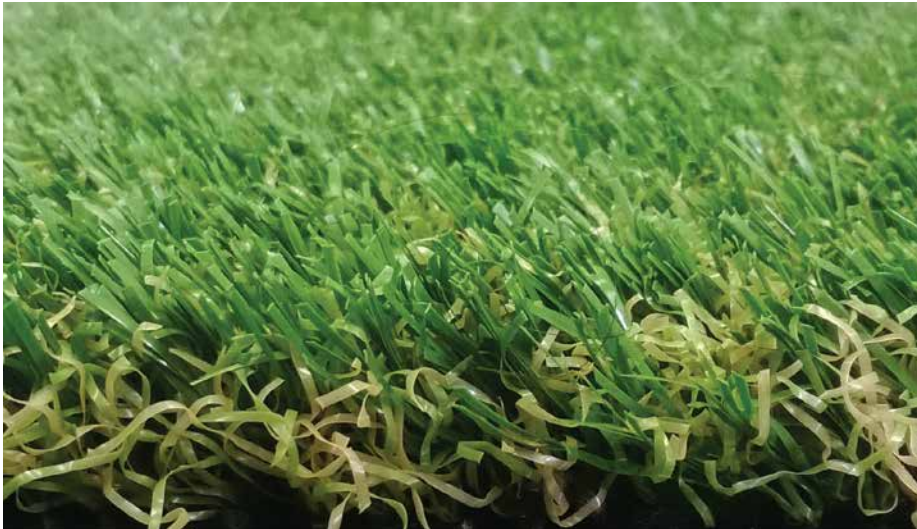

INSTALLATION

- Can be laid directly onto shock pad
- Loose-lay & adhesion of the seams to the underlying tape or with sewed seams. It is not recommended to install the carpet at temperatures below 10°C.
- Adhesive to be used: a solvent-free two compound reaction adhesive with a base of PU

TECHNICAL DATA

Type	: 5/16" tufted synthetic grass carpet, straight stitch pattern	
Pile Content	: Polyethylene (UV Resistant), monofilament with Curly yarn	
Primary Backing	: U.V.-stabilized primary backing, single layer	
Secondary Backing	: Latex compound with a base of styrene-butadiene, pervious to water by 4 mm wide drainage holes every 10 x 10cm	
Pile Height	: 35mm	+/- 5%
Total Thickness	: 38mm	+/- 5%
Stitch Per Metre	: 150	+/- 5%
Number of tufts m2	: 18900	+/- 5%
Yarn Weight	: 1120g/m	+/- 5%
Weight Primary backing	: 142gr/m2	+/- 5%
Weight Secondary backing	: 1000gr/m2	+/- 5%
Total Weight	: 2262gr/m2	+/- 5%
Roll Width	: Up to 4m	+/- 5%cm
Roll Length	: Please enquire	
Tuft Bond Stength	: ≥30 Newton	

TEST RESULTS

Water permeability	: tested unfilled: +/- 60 lites/m2/min
Colour fastness	: Xenon test: blue scales ≥7, grey scales ≥4

LINE SYSTEMS : Yes

COLOUR OF THE CARPET : Field Green & brown curly

INFILL : N/A

PRODUCT APPLICATION : Landscaping



THE LANDSCAPE GRASS COLLECTION



GREEN ULTIMATE 30



INSTALLATION

- Can be laid directly onto shock pad
- Loose-lay & adhesion of the seams to the underlying tape or with sewed seams. It is not recommended to install the carpet at temperatures below 10°C.
- Adhesive to be used: a solvent-free two compound reaction adhesive with a base of PU

TECHNICAL DATA

Type	: 5/16" tufted synthetic grass carpet, straight stitch pattern	
Pile Content	: Polyethylene (UV Resistant), monofilament with Curly yarn	
Primary Backing	: U.V.-stabilized primary backing, single layer	
Secondary Backing	: Latex compound with a base of styrene-butadiene, pervious to water by 4 mm wide drainage holes every 10 x 10cm	
Pile Height	: 30mm	+/- 5%
Total Thickness	: 33mm	+/- 5%
Stitch Per Metre	: 180	+/- 5%
Number of tufts m2	: 22680	+/- 5%
Yarn Weight	: 2300g/m	+/- 5%
Weight Primary backing	: 142gr/m2	+/- 5%
Weight Secondary backing	: 1000gr/m2	+/- 5%
Total Weight	: 3442gr/m2	+/- 5%
Roll Width	: Up to 4m	+/- 5%cm
Roll Length	: Please enquire	
Tuft Bond Strength	: >30 Newton	

TEST RESULTS

Water permeability	: tested unfilled: +/- 60 lites/m2/min
Colour fastness	: Xenon test: blue scales ≥7, grey scales ≥4

LINE SYSTEMS : Yes

COLOUR OF THE CARPET : Field Green & brown curly

INFILL : N/A

PRODUCT APPLICATION : Landscaping

THE LANDSCAPE GRASS COLLECTION



GREEN SUPREME



INSTALLATION

- Can be laid directly onto shock pad
- Loose-lay & adhesion of the seams to the underlying tape or with sewed seams. It is not recommended to install the carpet at temperatures below 10°C.
- Adhesive to be used: a solvent-free two compound reaction adhesive with a base of PU

TECHNICAL DATA

Type	: 5/16" tufted synthetic grass carpet, straight stitch pattern	
Pile Content	: Polyethylene (UV Resistant), monofilament with Curly yarn	
Primary Backing	: U.V.-stabilized primary backing, single layer	
Secondary Backing	: Latex compound with a base of styrene-butadiene, pervious to water by 4 mm wide drainage holes every 10 x 10cm	
Pile Height	: 30mm	+/- 5%
Total Thickness	: 33mm	+/- 5%
Stitch Per Metre	: 180	+/- 5%
Number of tufts m2	: 22680	+/- 5%
Yarn Weight	: 1810g/m	+/- 5%
Weight Primary backing	: 142gr/m2	+/- 5%
Weight Secondary backing	: 1000gr/m2	+/- 5%
Total Weight	: 2952gr/m2	+/- 5%
Roll Width	: Up to 4m	+/- 5%cm
Roll Length	: Please enquire	
Tuft Bond Stength	: ≥30 Newton	

TEST RESULTS

Water permeability	: tested unfilled: +/- 60 lites/m2/min
Colour fastness	: Xenon test: blue scales ≥7, grey scales ≥4

LINE SYSTEMS : Yes

COLOUR OF THE CARPET : Field Green & brown curly

INFILL : N/A

PRODUCT APPLICATION : Landscaping